
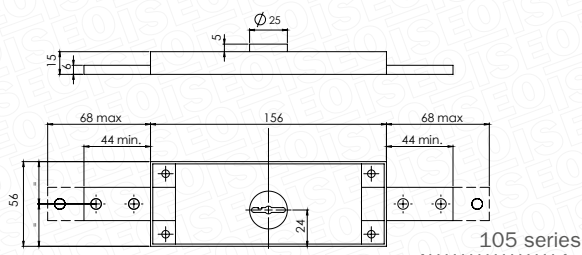
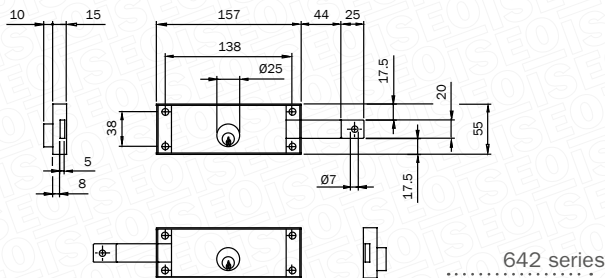


Locks for roller shutters

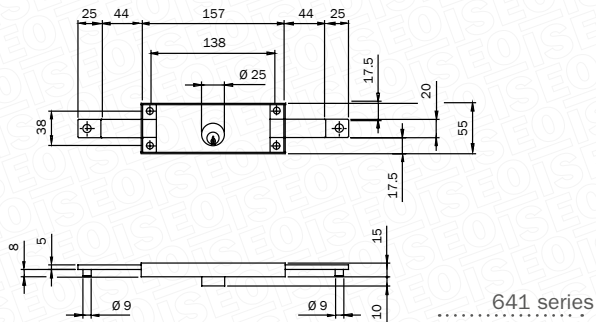

PRODUCT

Horizontal installation locks for roller shutters typically used for shops.

OPERATION

The key operates the locking bars.

RANGE:


- Locks with round cylinder, centre (641*)
- Locks with round cylinder, lateral, right or left (642*)
- Pair of locks with round cylinders, lateral, right + left (64203*)
- Lock with double bit security key, centre (105*)
- Lock with cross key, centre (1091*)

TEXT FOR SPECIFICATIONS:

Iseo 641-642 series horizontal installation locks for roller shutters with pin tumbler key 020409.

Iseo 105 series horizontal installation locks for roller shutters with double bit key 340065.

Iseo 105 series horizontal installation locks for roller shutters with cross key 910175 (length 75 mm) or 910110 (length 105 mm).

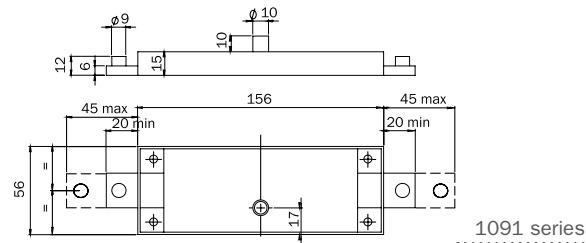

ISEO®

TECHNICAL FEATURES

- Casing dimensions 157 x 55 mm with cylinder at centre
- Bar travel 25 mm
- Bar connection points with pin or with screw and nut
- Cylinder pair diameter, 25 mm
- External cylinder protrusion, 10 mm
- 1 throw for cylinder locks, 2 throws for double map locks

HIGHLIGHTS

- Locks with similar dimensions to numerous existing models on the market;
- 25 mm bar travel for effective engagement in wall;
- Horizontal central (with 2 latch points) or lateral installation (1 latch point on right or left);
- Blank pin tumbler key 020409;
- Blank double bit key 34.00.65;
- Blank cross key 91.01.75 (length 75 mm) and 91.01.10 (length 105 mm).

www.iseo.com